

71632 U.S. PTO



05/27/97

Commissioner of Patents and Trademarks
Washington, D.C. 20231

Attorney Docket No.: QCPA377CIP

Date: May 27, 1997

56163 U.S. PTO
08/863457

Dear Sir:

This is a request for filing a Continuation-In-Part application under 37 U.S.C. § 1.53 of pending prior application Serial No. 60/040,319, filed on February 14, 1997 of Rajeev Krishnamurthi et al. for An Improved Call Origination Method and Apparatus in a Cellular Communication System.

Enclosed are:

- ☒ The above identified Continuation-In-Part (CIP) application.
- ☒ Six (6) sheets of informal drawings (one copy).
- ☐ An Assignment of the invention to QUALCOMM Incorporated.
- ☒ Unsigned Declaration/Power of Attorney.
- ☐ Verified Statement to establish small entity status under 37 CFR § 1.9 and 37 CFR § 1.27.
- ☐ Other:

The filing fee has been calculated as shown below:

| a | | b | | Small Entity | | Large Entity | |
|--|-------|--------|-----------|----------------------------------|-----------|-------------------------------------|--|
| CLAIMS: | Filed | Extra* | Rate | <u>Fee</u> Basic Fee \$385 | Rate | <u>Fee</u> Basic Fee \$770.00 | |
| Total | 14 | 0 | x \$11 = | | x \$22 = | \$0.00 | |
| Independent | 3 | 0 | x \$40 = | | x \$80 = | \$0.00 | |
| Multiple Dependent Claim(s): | | | \$130 | | \$260 | \$ | |
| * If the difference in Column "a" is less than zero, enter "0" under Column "b". | | | TOTAL FEE | | TOTAL FEE | \$770.00 | |

- ☐ A check in the amount of \$ ____ is enclosed to pay the filing fee of this application.
- ☒ Please charge Deposit Account No. 17 - 0026 of QUALCOMM Incorporated in the amount of \$770.00. The Commissioner is hereby authorized to charge payment of any additional fees which may be required, or credit any overpayment, to said Deposit Account No. 17 - 0026. A duplicate of this sheet is enclosed.

3. ☒ The Commissioner is further hereby authorized to charge to said Deposit Account No. 17 - 0026, pursuant to 37 CFR § 1.25(b), any fee whatsoever which may become properly due or payable, as set forth in 37 CFR § 1.16 to 37 CFR § 1.18 inclusive, for the entire pendency of this application without specific additional authorization.
4. ☐ Abandon prior application Serial No. _____ as of the filing date of this application so as to assure co-pendency with the parent application. A duplicate copy of this letter is enclosed for filing in the prior application file (may be used before payment of issue fee).
5. ☒ Priority of application Serial No. 60/040,319 filed on February 14, 1997 is claimed under 35 U.S.C. § 120.

Dated: May 27, 1997

By: Linli L. Golden
Linli L. Golden
Attorney for Applicants
Registration No. P40,622

QUALCOMM Incorporated
6455 Lusk Boulevard
San Diego, California 92121-2779
Telephone: (619) 651-1037
Facsimile: (619) 658-2502

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Continuation-in-Part)
Application of Serial No. 60/040,319 of) For: METHOD AND APPARATUS FOR
RAJEEV KRISHNAMURTHI ET AL.) PROVIDING AN ALERT WITH
Serial No. Unknown) INFORMATION SIGNAL BETWEEN
A MOBILE SWITCHING CENTER AND
A BASE STATION
Filed: May 27, 1997) Group Art Unit: Unknown

CERTIFICATE OF MAILING UNDER 37 CFR § 1.10

Asst. Commissioner of Patents
BOX PATENT APPLICATIONS
Washington, D.C. 20231

Dear Sir:

"Express Mail" mailing label No. EI052953475US
Date of Deposit May 27, 1997

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated above and is addressed to the Asst. Commissioner of Patents, Washington, D.C. 20231.

Danielle L. Miller

(Name)

Danielle L. Miller

(Signature)

QUALCOMM Incorporated
6455 Lusk Boulevard
San Diego, California 92121
Telephone: (619) 651-1037
Facsimile: (619) 658-2502

METHOD AND APPARATUS FOR PROVIDING AN ALERT WITH INFORMATION SIGNAL BETWEEN A MOBILE SWITCHING CENTER AND A BASE STATION

5 BACKGROUND OF THE INVENTION

I. Field of the Invention

10 The present invention relates to spread spectrum telecommunications systems. More particularly, the present invention relates to a novel and improved messaging method and apparatus in a CDMA communication system.

15 II. Description of the Related Art

The use of code division multiple access (CDMA) modulation techniques is one of several techniques for facilitating communications in which a large number of system users are present. Although other techniques such as time division multiple access (TDMA), frequency
20 division multiple access (FDMA), and amplitude modulation (AM) schemes such as amplitude companded single sideband (ACSSB) are known, CDMA has significant advantages over these other techniques. The use of CDMA techniques in a multiple access communication system is disclosed in U.S. Pat. No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS
25 COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS," assigned to the assignee of the present invention and incorporated by reference herein.

In the CDMA cellular system, a large number of mobile telephone system users, each having a transceiver, communicates through satellite
30 repeaters or terrestrial stations which are also referred to as cells. Each cell includes a physical plant called a base station. A cell covers a limited geographic area and routes calls carried over cellular telephones to and from a telecommunication network via a mobile switching center. When a cellular telephone user moves into the geographic area of a new cell, the
35 routing of that user's call may be eventually made through the new cell by a process called a "handoff."

A cellular telephone or, more specifically, a mobile station, broadcasts a signal that is received by a base station. The signal is then relayed to a mobile switching center which in turn routes the signal to the public
40 switched telephone network and to telephone lines or other mobile stations.

Similarly, a signal may be transmitted from the public switched telephone network to a mobile station via a base station and a mobile switching center. The communications channel allocated for communication of information between the mobile station and the base station is called the traffic channel.

5 The interface between the mobile station and the base station is referred to as the Air-Interface. The telecommunications industry association (TIA) has provided a standard for CDMA call processing on the Air-Interface entitled "IS-95-A Mobile Station - Base Station Compatibility Standard for Dual Mode Wideband Spread Spectrum Cellular System,"
10 hereinafter IS-95-A, which is incorporated by reference. The interface between the base station and the mobile switching center is referred to as the A-Interface. The TIA has provided for call processing on the A-Interface through the standard provided in "IS-634 Mobile Switching Center - Base Station Interface for Public 800 MHz," which is also incorporated by
15 reference. IS-95-A and IS-634 both define the messages and signals that are sent on their respective interfaces for the operation of a CDMA cellular telephone call.

The call flow in a CDMA environment requires processing on both the Air-Interface and the A-Interface. The successful progression of a call
20 requires that the proper messages and signals are sent at the right times on both the Air-Interface and the A-Interface. The IS-634 standard is being developed to provide for call processing on the A-Interface. A number of problems and deficiencies are present in IS-634 which currently does not support some of the necessary operations on the A-Interface. Some of these
25 problems and deficiencies are recognized and solved by the present invention in the manner described below.

SUMMARY OF THE INVENTION

30 The present invention is a novel and improved method and apparatus for providing a new message on the interface between a mobile switching center and a base station, also known as the A-Interface, of a cellular telephone system. The present invention recognizes that the A-Interface, as presently defined by the IS-634 standard, does not support some
35 of the operations necessary for reliable call processing. Introduction of the new message will provide support for required functionality on the A-Interface.

The present invention recognizes that improvements are needed for the A-Interface to reliably handle the call waiting and the hard handoff

procedures. In addition, a better technique is needed for resolving a glare condition. An Alert With Information Message is introduced on the A-Interface to improve the operation of these procedures.

Using the call waiting feature, a mobile station may have a first party
5 of a public switched telephone network put on hold while being connected
to a second party. If the second party hangs up, then according to the current
procedure, a Release/Clear Message (or an equivalent message) is sent to the
mobile station, causing the mobile station to release its traffic channel. A
new traffic channel must then be reestablished to reconnect the mobile with
10 the first party. The present invention recognizes that the current procedure
is unreliable in that difficulties may arise in the process of reconnecting the
mobile with the first party. Moreover, Air-Interface resources are used
inefficiently as the current procedure requires the release of the traffic
channel and the reassignment of a new channel. To overcome these
15 shortcomings, an Alert With Information Message is sent on the A-Interface
to the base station, triggering the transmittal of an Alert With Information
Message on the Air-Interface. Upon receipt of the Alert With Information
Message, the mobile station is prompted to transmit a Connect Message to
the mobile switching center via a base station. The mobile switching center
20 then reconnects the first party to the mobile station, without the need to
reestablish a new traffic channel.

A hard handoff occurs in a cellular system when a mobile station
moves from the coverage area of one base station to the coverage area of
another base station. During a mobile station terminated call, in order for
25 the mobile to undertake handoff, it must first receive an Alert With
Information Message transmitted by the base station. Under current
procedure, the Alert With Information Message is generated and
transmitted solely by the base station in whose coverage area the mobile is
currently located. The present invention recognizes that the current
30 procedure may cause the hard handoff procedure to be unreliable. If the
mobile moves from the coverage area of a first base station to the coverage
area of a second base station, the mobile station may never receive the Alert
With Information Message from the first base station, resulting in a dropped
call. Thus, the present invention provides for an Alert With Information
35 Message to be generated and transmitted by the mobile switching center.
While the mobile station is moving from the coverage area of the first base
station to that of the second base station, the mobile switching center
transmits the Alert With Information Message to the second base station.
The second base station in turn transmits an Alert With Information

Message to the mobile station. Having received the Alert With Information Message, handoff can now proceed without the call being dropped.

A mobile subscriber may attempt to originate a call while another party is attempting to call the same mobile subscriber, resulting in a glare condition. The Air-Interface standard, IS-95-A, provides the mobile the option of aborting the call that it is originating and responding to the call that it is receiving. However, the present invention recognizes that the mobile may not successfully receive the call because the base station is not configured to transmit the proper messages to the mobile when a glare condition occurs. In order for the mobile subscriber to respond to a call, it is necessary for the mobile to receive an Alert With Information Message. However, the standard currently does not address this situation. As a result, the call may be dropped. The present invention recognizes that the resolution of the glare condition should be undertaken at the mobile switching center. The mobile switching center, upon receiving a message indicative of a mobile originating a call and subsequently receiving a message indicative of the same mobile receiving a call, should recognize that the mobile is proceeding with receiving a call. The mobile switching center should then transmit an Alert With Information Message to the base station, triggering the base station to transmit an Alert With Information Message to the mobile station. As the Alert With Information Message is received by the mobile station, the glare condition is resolved without the call being dropped.

Benefits and advantages of the present invention will become apparent from the following description of the preferred embodiment when it is considered with reference to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a block diagram presenting a schematic overview of an exemplary CDMA cellular telephone system in accordance with the present invention;

FIG. 2 is a block diagram illustrating an exemplary call-waiting scenario according to the current IS-634 standard;

FIG. 3 is a block diagram illustrating a call-waiting scenario according to the present invention;

FIG. 4 is a flow chart illustrating an exemplary embodiment of the processing steps involved in call-waiting as implemented by the processing elements of FIG. 3;

FIG. 5 is a block diagram illustrating an exemplary hard handoff scenario in a cellular telephone system;

FIG. 6 is a state diagram illustrating the states of a mobile station in a mobile station terminated call;

FIG. 7 is a block diagram illustrating an exemplary embodiment of the hard handoff scenario according to the present invention;

FIG. 8 is a flow chart illustrating an exemplary embodiment of the processing steps involved in hard handoff as implemented by the processing elements of FIG. 3;

FIG. 9 is a block diagram illustrating an exemplary embodiment of the processing elements involved in the resolution of a glare condition; and

FIG. 10 is a flow diagram illustrating the occurrence and the resolution of a glare condition.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An exemplary CDMA cellular mobile telephone system in which the present invention is embodied is illustrated in FIG. 1. The CDMA cellular telephone system is indicated generally by 9 and includes a mobile switching center (MSC) 10, also referred to as a mobile telephone switching office (MTSO), that includes interface and processing circuitry for providing system control to the base stations. The MSC 10 routes telephone calls from a public switched telephone network (PSTN) 11 to the appropriate base station for transmission to the appropriate mobile station. The MSC 10 also controls the routing of calls from the mobile stations via one or more base stations to the PSTN 11. In addition, the MSC 10 may direct calls between mobile stations via the appropriate base stations. The MSC 10 may be coupled to the base stations by various conventional means, such as dedicated telephone lines, optical fiber links, or by radio frequency communications.

It should be understood that although the present invention is described herein within the context of a CDMA cellular communications system, it is equally applicable to other types of communication systems,

such as the personal communication system (PCS). Furthermore, systems utilizing other well known transmission modulation schemes such as TDMA and FDMA as well as other spread spectrum systems may employ the present invention.

5 In FIG. 1, two exemplary base stations (BSs), 12 and 14, along with two exemplary mobile stations (MSs) 16 and 18, each including a cellular telephone, are illustrated. Arrows 20a and 20b represent forward and reverse code channels that define a possible communication link between BS 12 and MS 16. Arrows 22a and 22b define a possible communication link
10 between BS 12 and MS 18. Similarly, BS 14 can establish a two-way communication link with MS 18 as represented by arrows 24a and 24b and with MS 16 as represented by the arrows 26a and 26b.

As previously mentioned, the interface between BSs 12 and 14 and MSs 16 and 18 is called the Air-Interface, and in the exemplary embodiment,
15 call processing on the Air-Interface is governed by IS-95-A. Also as previously mentioned, the interface between MSC 10 and BSs 12 and 14 is called the A-Interface, and call processing on the A-Interface is governed by IS-634. The present invention recognizes that the A-Interface as currently defined by IS-634 lacks support for some of the necessary functionality for
20 reliable call processing. In addition, the present invention recognizes that introduction of a new message on the A-Interface will cure some of the deficiencies of the A-Interface.

An exemplary procedure in which deficiencies are recognized on the A-Interface is the call waiting procedure. Call waiting is one feature
25 available to the CDMA cellular subscriber. The call waiting feature allows a cellular subscriber to toggle between two parties on the telephone network. Call waiting may be provided in a CDMA telephone system according to the techniques disclosed in copending U.S. Patent Application Serial No. 08/535,998, entitled "Early Detection of Mobile to Mobile," filed September
30 29, 1995, which is assigned to the assignee of the present invention and incorporated by reference herein.

An exemplary call waiting scenario is illustrated in FIG. 2. In FIG. 2, party 1 28 and party 2 30 are two parties of a PSTN. A call has been established between MS 32 and party 1 28. A traffic channel has been set up
35 between MS 32 and BS 34 on the Air-Interface. Furthermore, BS 34 is connected to MSC 36 on the A-Interface by any of various conventional means as described above.

If party 2 30 calls MS 32 while MS 32 is communicating with party 1 28, MSC 36 will send signaling data to BS 34 indicating that another party is

attempting to contact MS 32. The means for combining traffic data and signaling data is described in detail in U.S. Pat. No. 5,511,073, entitled "METHOD AND APPARATUS FOR THE FORMATTING OF DATA FOR TRANSMISSION," assigned to the assignee of the present invention and
5 incorporated by reference herein. To inform MS 32 that another call is coming in, an alerting signal is relayed by BS 34 to MS 32 either by a Flash With Information message or an inband tone. Then, MS 32 can invoke the call waiting feature by pushing a specific key on the MS keypad. This causes the generation of a Flash With Information Message, which is sent on the
10 Air-Interface to BS 34, which in turn relays the Flash With Information Message on the A-Interface to MSC 36. MSC 36 then connects party 2 30 to MS 32 while putting party 1 on hold. Thereafter, MS 32 may toggle between party 1 28 and party 2 30 by pushing the key on the keypad to cause the generation of the Flash With Information Message. Each time MSC 36
15 receives the Flash With Information Message, it connects MS 32 to the party that was previously put on hold and puts on hold the party that was previously on the line.

Referring still to FIG. 2, assume that party 1 28 is on hold and MS 32 is connected to party 2 30. If party 2 30 hangs up, then according to the current
20 procedure, the network which is servicing party 2 generates a Release Message. This Release Message propagates to MSC 36, which then sends the Release Message to BS 34 on the A-Interface. BS 34 in turn sends a Release Message to MS 32 on the Air-Interface to cause MS 32 to release its traffic channel. MSC 36 then signals to BS 34 that party 1 28 is attempting to
25 contact MS 32. This causes BS 34 to send a Paging message to MS 32 to indicate that a call is incoming. In response, MS 32 generates a Paging Response Message which is transmitted to BS 34. BS 34 then transmits the Paging Response Message to MSC 36. On receipt of a Paging Response Message, MSC 36 assigns a new traffic channel to MS 32 and MS 32 is
30 reconnected to party 1 28.

The present invention recognizes that this procedure has several shortcomings. First, it does not efficiently use the Air-Interface resource, since it requires the release of the traffic channel, re-paging of MS 32 and the assignment of a new traffic channel. Further, the need to obtain a new
35 traffic channel makes it difficult to reestablish the connection between MS 32 and party 1 28. If MS 32 moves away from BS 34 from which it is released, the page from MSC 36 may not be received by MS 32. At the very least, this increases the amount of time that party 1 28 has to wait for the reconnection with MS 32. There is also the possibility that the connection between MS 32

and party 1 28 cannot be reestablished, resulting in a dropped call. A better procedure is needed to handle the procedure for releasing party 2 30 from MS 32 wherein MS 32 is using the call waiting feature.

To overcome the shortcomings, the present invention introduces a
5 new message for the A-Interface. A preferred embodiment of the present invention is illustrated in FIG. 3. The preferred embodiment provides for a new message, an Alert With Information Message, on the A-Interface. The Alert With Information Message is currently available on the Air-Interface under IS-95-A. According to IS-95-A, the Alert With Information Message is
10 sent by a base station to a mobile station to cause the mobile to ring and to transition from a Conversation State to a Waiting For Answer State, expecting the mobile user to intervene. By providing for an Alert With Information Message on the A-Interface, the mobile switching center can better control the progress of the call waiting procedure.

Referring to FIG. 3, assume again that party 1 28 is on hold and MS 32
15 is in communication with party 2 30. If party 2 30 then hangs up, the network servicing party 2 30 generates a Release Message as described above. In the preferred embodiment, when the Release Message comes from the network, MSC 36 intercepts it, and message generator 38 in MSC 36
20 generates an Alert With Information Message signal, which is sent to BS 34 on the A-Interface. Message receiver 40 in BS 34 receives the Alert With Information Message, and BS 34 in turn sends an Alert With Information Message to MS 32 on the Air-Interface. When MS 32 receives the Alert With Information Message, it generates an alerting signal in the mobile and
25 waits for the subscriber to answer. When the subscriber answers by pressing a key on keypad of MS 32, a Connect Message generated by MS 32 is sent to BS 34 and forwarded to MSC 36. On receiving the Connect Message, MSC 36 connects party 1 28 to MS 32.

In the preferred embodiment, by not permitting the Release Message
30 (or a Clear Message) from the network to be sent to MS 32, MS 32 is not caused to release the traffic channel when party 2 30 hangs up. As a result, there is no need to expend additional Air-Interface resources for the assignment of a new traffic channel. Furthermore, the preferred embodiment does not require MS 32 to be paged following the release of the
35 traffic channel to indicate that party 1 28 is still waiting to be reconnected with MS 32. Consequently, the risk that MS 32 will move away from the coverage area of BS 34 and not receive the page is eliminated.

A brief illustration of the steps involved in call waiting as described in the embodiment above is shown in FIG. 4. FIG. 4 shows a flow chart

illustrating some of the steps involved in the processing as discussed with reference to FIG. 3.

Another procedure in which deficiencies are recognized on the A-Interface is the handoff procedure. In a cellular communication system, a handoff must take place when a mobile station moves from the coverage area of one base station to another base station. A geographic area in a cellular system is divided up into cells. Each cell is serviced by a corresponding base station. In a hard handoff environment, as a mobile station moves from one cell to another cell, communication with the original base station is terminated before communication with the subsequent base station is established. In a soft handoff environment, communication with the subsequent base station is established before terminating communication with the original base station. U.S. Patent No. 5,267,261, which is incorporated by reference and assigned to the assignee of the present invention, discloses a method and system for providing soft handoff.

The hard handoff procedure in a mobile terminated call may be understood with reference to FIGS. 5 and 6. As illustrated in FIG. 5, as MS 42 moves from the coverage area of BS1 44 to BS2 46, a connection needs to be established between MS 42 and BS2 46 while MS 42 needs to be disconnected from BS1 44. Both BS1 44 and BS2 46 are shown to be connected to MSC 48 in FIG. 5. However, it should be understood that a hard handoff can also occur when a mobile station moves from the control of one mobile switching center to another. In fact, the different mobile station controllers may support different modulation techniques such as TDMA or FDMA.

In FIG. 6, the states of a mobile station in a mobile terminated call are briefly illustrated. The states are summarized herein and explained more fully in the aforementioned document IS-95-A, pages 6-160 to 6-161.

The progression of the hard handoff procedure is dependent on the state of the mobile station. Referring to FIG. 6, in a mobile station terminated call, the mobile is in the Traffic Channel Initialization State, shown by block 50, when a traffic channel has been established between a mobile station and a base station. Upon receipt of a Base Station Acknowledgment Order from the base station, the mobile moves into the Waiting For Order State, shown by block 52. The mobile station then transitions into the Waiting For Answer State, illustrated by block 54, when it receives an Alert With Information Message from the base station. When the mobile station subscriber answers the call by pushing a specific key on the mobile station keypad, the mobile transitions into the Conversation

State, represented by block 56. The mobile transitions into the Release State, shown by block 58, when conversation terminates.

According to the current procedure, a mobile station should be in the Waiting For Answer State 54 or the Conversation State 56 during hard
5 handoff. If the mobile is in any other state, the call is likely to be dropped during hard handoff. Thus, the mobile station must receive an Alert With Information Message transmitted by the base station on the Air-Interface before the mobile station undertakes handoff. Otherwise, the handoff procedure would be unreliable. Referring again to FIG. 5, assume that MS 42
10 is in the coverage area of BS1 44. If MS 42 subsequently moves from the coverage area of BS1 44 to the coverage area of BS2 46 while MS 42 is in the Waiting For Order State 52, MS 42 may not receive the Alert With Information Message sent by BS1 44. Without receiving the Alert With Information Message, MS 42 cannot transition into the Waiting For Answer
15 State 54 in the coverage area of BS2 46. As a result, the call will be dropped while handoff is in progress. Thus, the present invention recognizes that a better method for handling hard handoff in a mobile station terminated call is necessary.

As previously described, providing an Alert With Information
20 Message on the A-Interface overcomes the shortcomings in the call waiting procedure. The present invention recognizes that providing an Alert With Information Message on the A-Interface will also overcome the shortcomings in a hard handoff procedure in a mobile station terminated call. Further, it should be understood that the present invention applies to
25 hard handoff procedures in a variety of communication environments, including CDMA, TDMA, or FDMA.

A preferred embodiment of the use of an Alert With Information Message on the A-Interface in a hard handoff procedure is illustrated in FIG. 7 with reference to FIG. 6. An Alert With Information Message is generated
30 by message generator 50 in MSC 48 and sent to message receiver 52 in BS2 46. The Alert With Information Message is sent on the A-Interface when MS 42 is moving from the coverage area of BS1 44 to the coverage area of BS2 46 while in the Waiting For Order State. After BS2 46 receives the Alert With Information Message from MSC 48, BS2 46 then sends an Alert With
35 Information Message to MS 42 on the Air-Interface. Having received the Alert With Information Message, MS 42 can transition into the Waiting For Answer State 54 while in the coverage area of BS2 46, and handoff can occur without the call being dropped. Thus, by providing for an Alert With Information Message on the A-Interface, MSC 48 has better control of the

hard handoff procedure. Since MSC 48 can send the Alert With Information Message to BS2 46, causing BS2 46 to send the Alert With Information Message to MS 42, MS 42 does not need to rely on receiving the Alert With Information Message from BS1 44 in order to transition into the
5 Waiting For Answer State 54. Consequently, handoff can occur without the call being dropped. A flow chart illustrating some of the processing steps involved in hard handoff as described in the embodiment above is shown in FIG. 8.

Still another procedure in which deficiencies are recognized on the A-
10 Interface is the handling of a glare condition. A glare condition may occur when a mobile subscriber attempts to initiate a call while another party is attempting to call the mobile subscriber. A call initiated by a mobile subscriber is referred to as a mobile station originated call, while a call made to a mobile subscriber is referred to as a mobile station terminated call.

15 The glare condition may be better understood by referring back to FIG. 1. In a mobile station originated call, an Origination Message is transmitted from a mobile station, such as MS 16, to a base station, such as BS 12, upon initiation of a call by MS 16. After transmission of the Origination Message but before a connection is established between MS 16 and the called party
20 (party A of PSTN 11), another party (party B of PSTN 11) may attempt to contact the mobile subscriber and MSC 10 may page MS 16, resulting in a glare condition. The Air-Interface standard, IS-95-A, permits MS 16 the option of aborting the call to party A and responding to the call from party B. MS 16 then follows the state transition sequence for a mobile station
25 terminated call as illustrated in FIG. 6.

Referring now to FIG. 6, in a mobile station termination scenario, the mobile expects to receive an Alert With Information Message to transition from the Waiting For Order State, represented by block 52, to the Waiting For Answer State, represented by block 54. If the Alert With Information
30 Message is not received, the mobile would time out and release the call.

It is recognized by the present invention that current procedures under IS-95-A and IS-634 do not properly resolve the glare condition. Currently, the base station is not configured to transmit an Alert With Information Message to the mobile station upon occurrence of a glare
35 condition. The problem is explained in greater detail with reference to FIG. 9. Referring to FIG. 9, when MS 60 originates a call, an Origination Message is sent from MS 60 to BS 62. In response to the Origination Message, BS 62 transmits a BS Acknowledgment Order to MS 60. Meanwhile, MSC 64 receives an incoming call to the same MS 60, unaware of the origination

effort in progress, and sends a Paging Request Message to BS 62 to initiate a mobile terminated call setup. BS 62 in turn sends a Page Message containing the MS address, and the Page Message is received by MS 60.

Due to the mobile origination attempt, BS 62 constructs a Service Request Message and sends the message to MSC 64. However, after receiving the Page Message, MS 60 aborts the origination call setup, and responds by transmitting a Paging Response Message, which is received by BS 62. But because MSC 64 had received a Service Request Message from BS 62, MSC 64 in response sends an Assignment Request Message to BS 62, requesting assignment of Air-Interface resources for the mobile station originated call. Upon receipt of the Assignment Request Message, BS 62 assumes that a mobile station originated call is in progress, and does not transmit an Alert With Information Message to MS 60. As a result, MS 60 times out waiting for the Alert With Information Message, and the mobile station terminated call is dropped.

In order to better resolve the glare condition, the present invention provides for still another use of the Alert With Information Message on the A-Interface. First, note that after BS 62 receives a Paging Response Message from MS 60, BS 62 in turn sends a Paging Response Message to MSC 64. Then, in a preferred embodiment, the present invention provides for an Alert With Information Message to be transmitted on the A-Interface if MSC 64 receives a Service Request Message and then a Paging Response Message. Still referring to FIG. 9, it can be seen that the Alert With Information Message may be generated in MSC 64 by message generator 66, while the Alert With Information Message may be received in BS 62 by message receiver 68. After BS 62 receives the Alert With Information Message from MSC 64, BS 62 then sends an Alert With Information Message to MS 60 on the Air-Interface. Having received the Alert With Information Message, MS 60 can transition into the Waiting For Answer State, and the glare condition is resolved without the call being dropped.

Referring now to FIG. 10, a flow chart illustrating some of the processing steps involved in the resolution of the glare condition as discussed with reference to FIG. 9 is shown. An Alert With Information Message is provided on the A-Interface to resolve the glare condition.

The present invention recognizes that for the call waiting, hard handoff, and resolution of a glare condition procedures, there are certain deficiencies in call processing on the A-Interface as currently defined by IS-634. By providing an Alert With Information Message on the A-Interface, the present invention overcomes these deficiencies. The Alert With

Information Message is already available on the Air-Interface under IS-95-A to cause a mobile station to transition from the Waiting For Order State to the Waiting For Answer State. An Alert With Information Message is provided on the A-Interface to trigger the transmittal of the Alert With
5 Information Message on the Air-Interface, solving the problems of the call-waiting and handoff procedures as well as resolving the glare condition.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to
10 those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

15

I CLAIM:

CLAIMS

1. A telecommunications messaging system, comprising:
2 a message generator in a mobile switching center for generating a
message signal, said message signal for transmission to a base station for
4 triggering said base station to transmit a subsequent message signal to a
mobile station; and
6 a message receiver in said base station for receiving said message
signal;
8 wherein said message signal is generated upon detection of a glare
condition by said mobile switching center.

2. The messaging system of claim 1 wherein said glare condition
2 is detected when said mobile switching center receives a message indicative
of a mobile station call origination and a message indicative of a mobile
4 station call termination in quick succession.

3. The messaging system of claim 2 wherein said message
2 indicative of a mobile station call origination is a Service Request Message
and said message indicative of a mobile station call termination is a Paging
4 Response Message.

4. The messaging system of claim 1 wherein said message signal
2 is an Alert With Information Message signal and said subsequent message
signal is an Alert With Information Message signal.

5. The messaging system of claim 3 wherein said message signal
2 is an Alert With Information Message signal and said subsequent message
signal is an Alert With Information Message signal.

6. A cellular communication system, comprising:
2 a mobile station;
a base station in communication with said mobile station via an Air-
4 Interface, said base station defining a first cellular coverage area;
a mobile switching center in communication with said base station
6 via an A-Interface;
a message generator at said mobile switching center for generating a
8 message signal for transmission to said first base station on said A-Interface;
and

10 a message receiver at said base station for receiving said message
signal, wherein upon receipt of said message signal, said first base station
12 transmits a subsequent message signal to said mobile station on said Air-
Interface;

14 wherein said message generator generates said message signal when
said mobile switching center detects a glare condition.

7. The cellular communication system of claim 6 wherein said
2 message signal is an Alert With Information Message signal and said
subsequent message signal is an Alert With Information Message signal.

8. The cellular communication system of claim 6 wherein said
2 glare condition is detected when said mobile switching center receives a
message indicative of a mobile station call origination and a message
4 indicative of a mobile station call termination in quick succession.

9. The cellular communication system of claim 8 wherein said
2 message indicative of a mobile station call origination is a Service Request
Message and said message indicative of a mobile station call termination is a
4 Paging Response Message.

10. The cellular communication system of claim 9 wherein said
2 message signal is an Alert With Information Message signal and said
subsequent message signal is an Alert With Information Message signal.

11. A method for messaging between a mobile switching center
2 and a base station, comprising the steps of:
detecting the occurrence of a glare condition;
4 generating a message signal in said mobile switching center based on
a positive result of said step of detecting; and
6 transmitting said message signal to said base station on an A-
Interface, wherein upon receipt of said message signal, said base station
8 transmits a subsequent message signal to a mobile station on an Air-
Interface;

12. The method of claim 11 wherein said step of detecting
2 comprises the steps of:
determining if a message indicative of a mobile station call
4 origination is received at said mobile switching center; and

determining if a message indicative of a mobile station call
6 termination is received at said mobile switching center.

13. The method of claim 12 wherein said message indicative of a
2 mobile station call origination is a Service Request Message and said
message indicative of a mobile station call termination is a Paging Response
4 Message.

14. The method of claim 13 wherein said message signal is an
2 Alert With Information Message signal and said subsequent message signal
is an Alert With Information Message signal.

ABSTRACT

The invention is a method and apparatus for providing an Alert With Information Message signal between a mobile switching center and a base station in a cellular communication system. The invention recognizes that current provisions of the IS-634 standard lack support for certain required functionality on the interface between a mobile switching center and a base station, or the A-Interface. An Alert With Information Message signal is introduced on the A-Interface to support the required functionality. Introduction of the Alert With Information Message provides support for reliable call processing on the A-Interface for the call waiting procedure, the hard handoff procedure, and the resolution of a glare condition.

2025 RELEASE UNDER E.O. 14176

COMBINED DECLARATION / POWER OF ATTORNEY

ATTORNEY DOCKET NO.: QCPA377CIP

AS BELOW NAMED INVENTOR, I HEREBY DECLARE THAT: This Declaration is of the following type:

☐ Original
 ☐ Supplemental
 ☒ Continuation-In-Part
 ☐ Divisional
☐ Continuation
 ☐ National Stage of PCT

My residence, post office address and citizenship are as stated below next to my name: I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND APPARATUS FOR PROVIDING AN ALERT WITH INFORMATION SIGNAL BETWEEN A MOBILE SWITCHING CENTER AND A BASE STATION** the specification of which:

☒ is attached hereto.
☐ was filed on _____ as Serial No. _____
☐ was amended on _____ (if applicable).
☐ was described and claimed in PCT International Application No. _____ filed on _____
 and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of the this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56(a).

I hereby claim foreign priority benefits under Title 35, United states Code, Sec. 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

Priority Claimed

| (Country) | (Application No.) | (Day/Month/Year/Filed) | (Yes) | (No) |
|-----------|-------------------|------------------------|-------|-------|
| _____ | _____ | _____ | _____ | _____ |
| (Country) | (Application No.) | (Day/Month/Year/Filed) | (Yes) | (No) |

I hereby claim the benefit under Title 35 USC 120 of the United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 USC 112, I acknowledge the duty to disclose material information as defined in Title 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

| | | |
|----------------------------|------------------------------------|---------------------|
| 60/040,319 (Serial No.) | February 14, 1997 (Filing Date) | Pending (Status) |
| _____ (Serial No.) | _____ (Filing Date) | _____ (Status) |

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith: Russell B. Miller, Reg. No. 31,122, Gregory D. Ogrod, Reg. No. 30,880, Brian S. Edmonston Reg. No. 38,864, Roger W. Martin, Reg. No. 39,291, Linli L. Golden, Reg. No. P40,622, Truong T. Dinh, Reg. No. P40,993, and/or Sean English, Reg. 37,319. Please direct all telephone calls to Russell B. Miller at (619) 658-4833 and address all correspondence to: Russell B. Miller, QUALCOMM Incorporated, 6455 Lusk Boulevard, San Diego, California 92121-2779.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

| | | |
|---|--------------------------------------|------|
| Full Name of Sole or First Inventor Rajeev Krishnamurthi | Inventor Signature FILED UNSIGNED | Date |
| Residence 12795 Calle De La Siena, San Diego, California 92130 | Citizenship India | |
| Post Office Address 12795 Calle De La Siena, San Diego, California 92130 | | |
| Full Name of Second or Joint Inventor if any Bibhu P. Mohanty | Inventor Signature FILED UNSIGNED | Date |
| Residence 4028 Mahaila Avenue, #C, San Diego, California 92122 | Citizenship India | |
| Post Office Address 4028 Mahaila Avenue, #C, San Diego, California 92122 | | |

| | | |
|---|---|------|
| Full Name of Third or Joint Inventor if any Roy F. Quick, Jr. | Inventor Signature FILED UNSIGNED | Date |
| Residence 4502 Del Monte Avenue, San Diego, California 92107 | Citizenship United States of America | |
| Post Office Address 4502 Del Monte Avenue, San Diego, California 92107 | | |

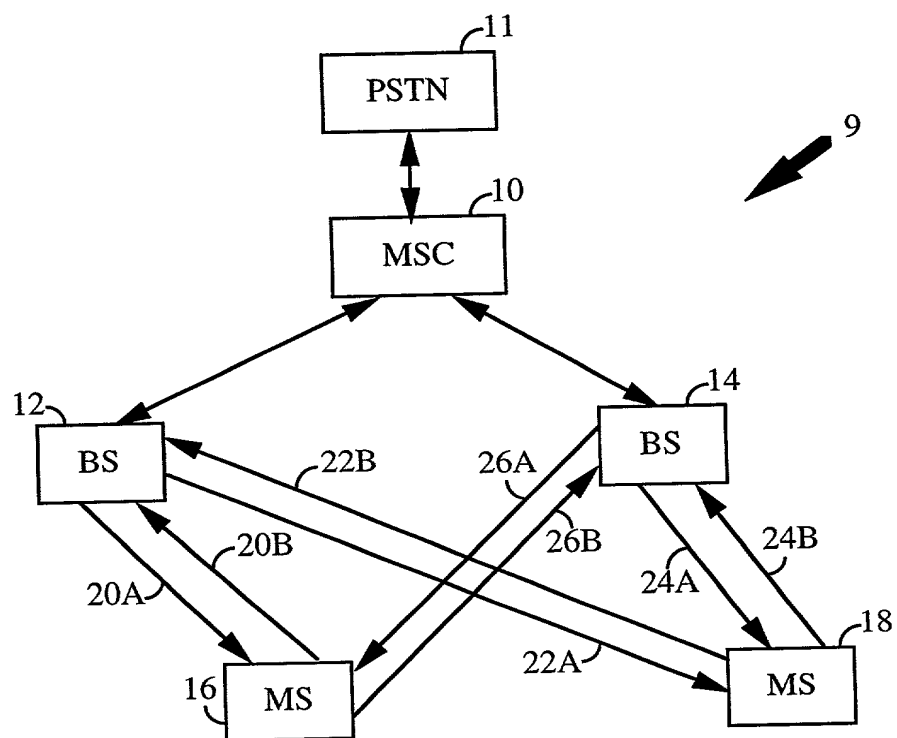


FIG. 1

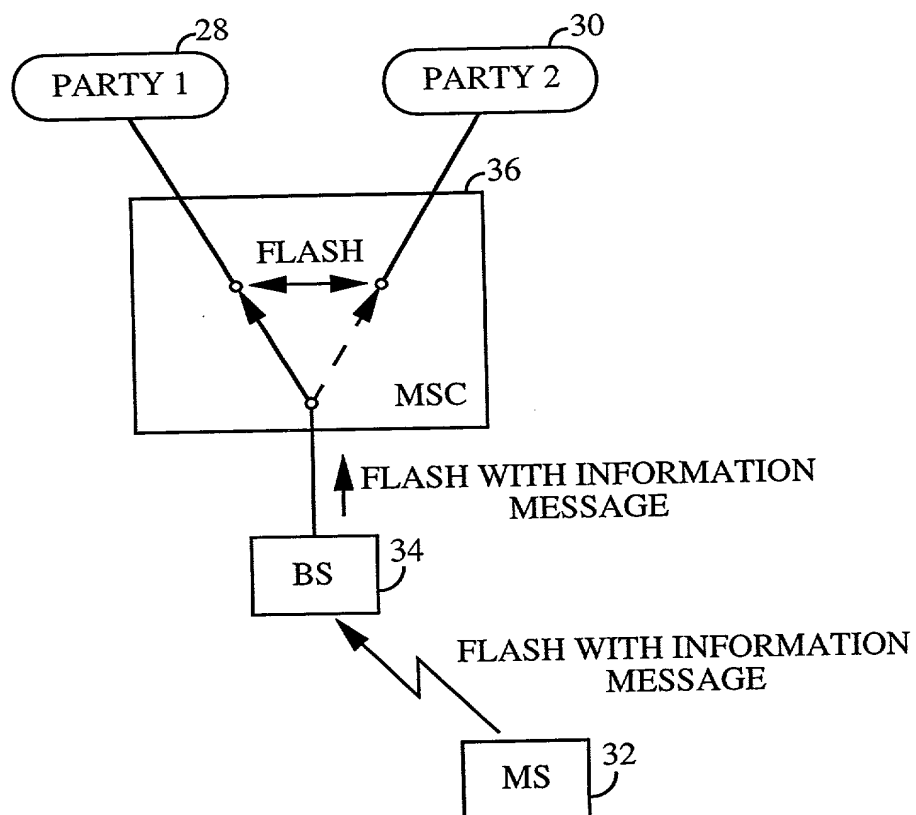


FIG. 2

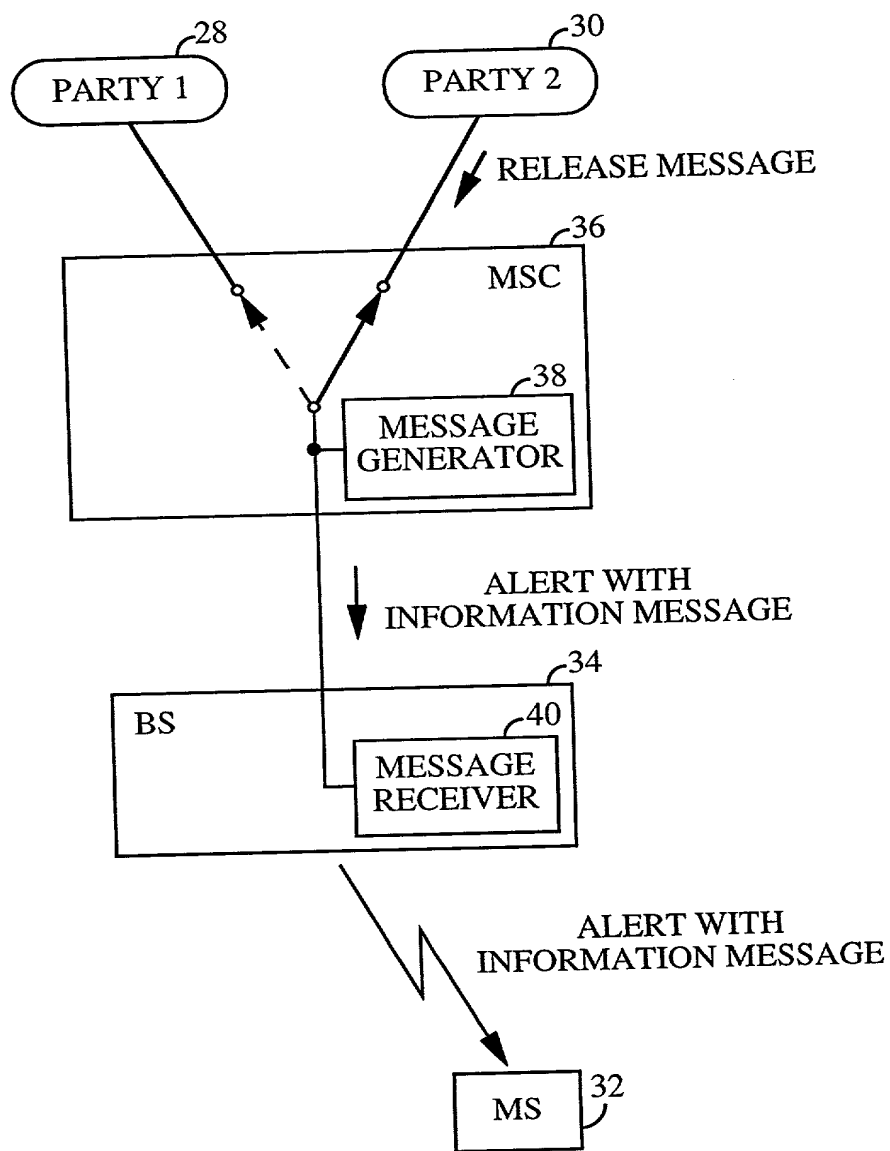


FIG. 3



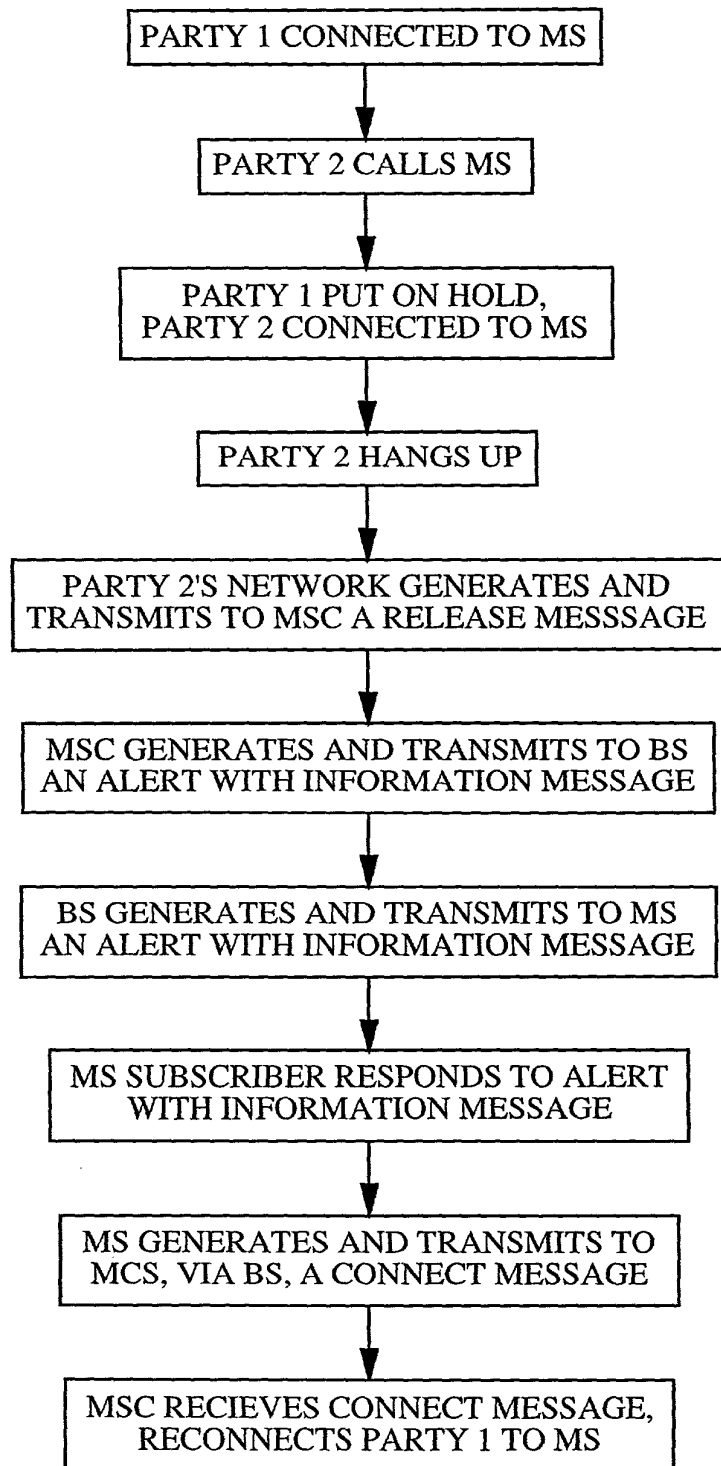


FIG. 4

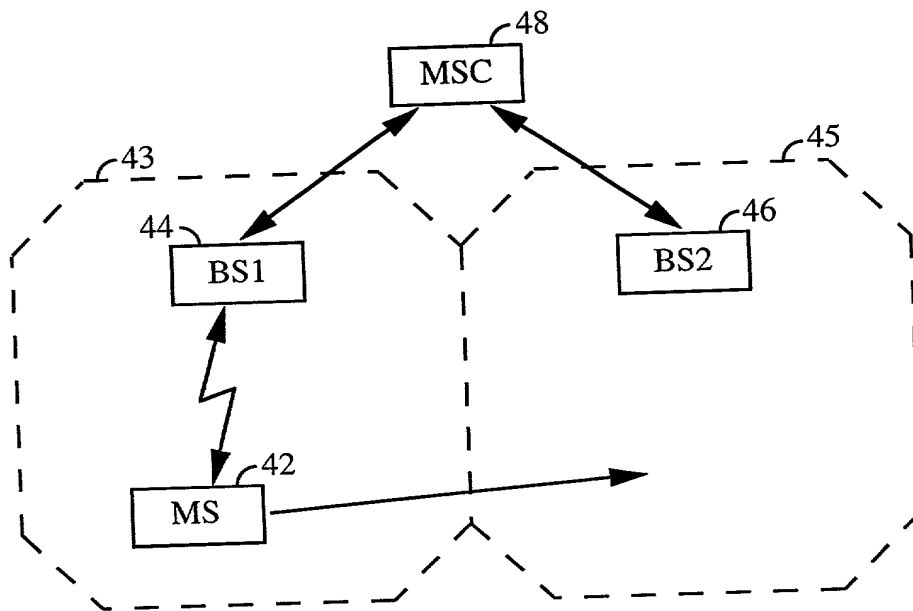

PRIOR ART
FIG. 5

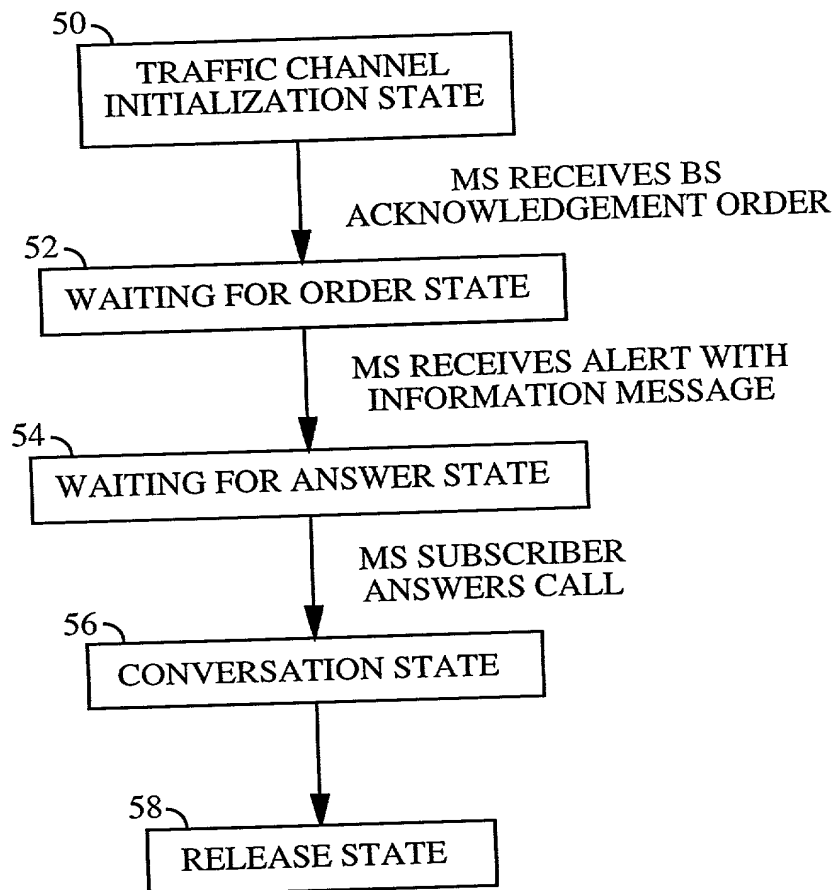

PRIOR ART
FIG. 6

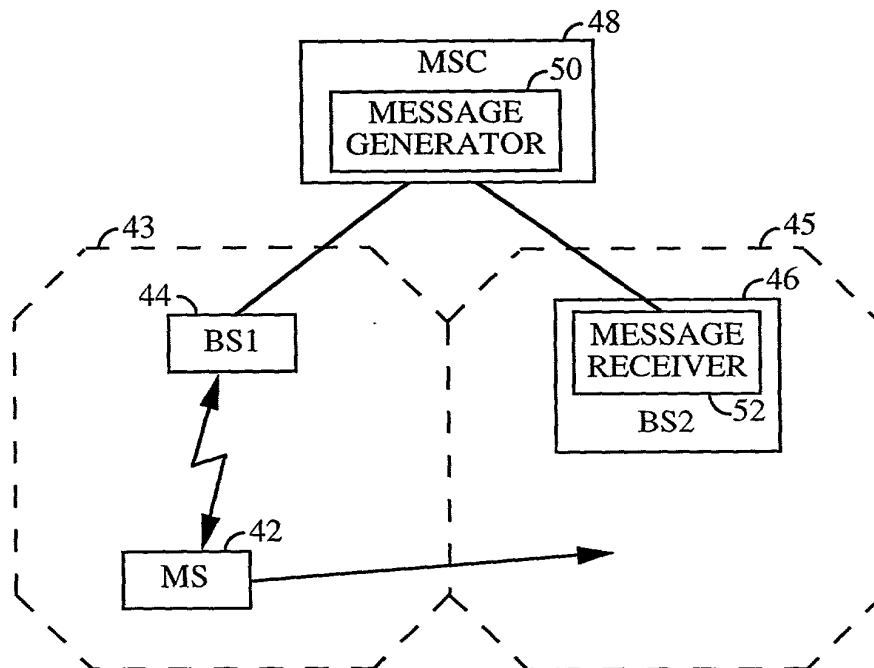


FIG. 7

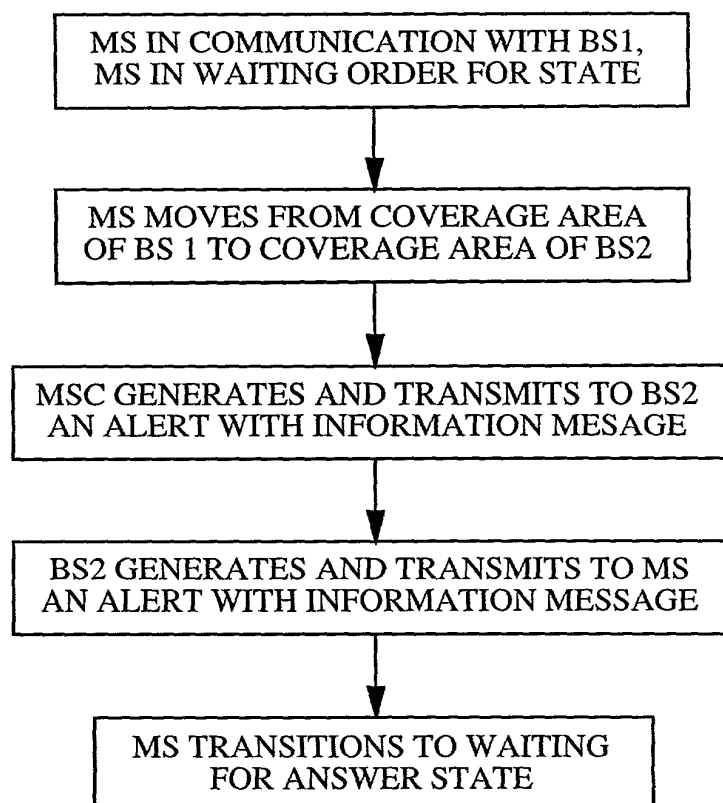


FIG. 8

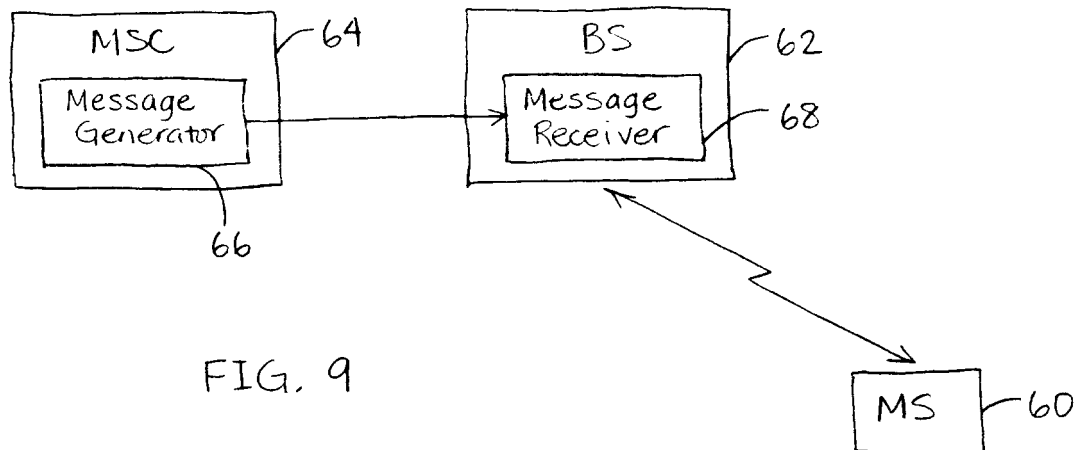


FIG. 9

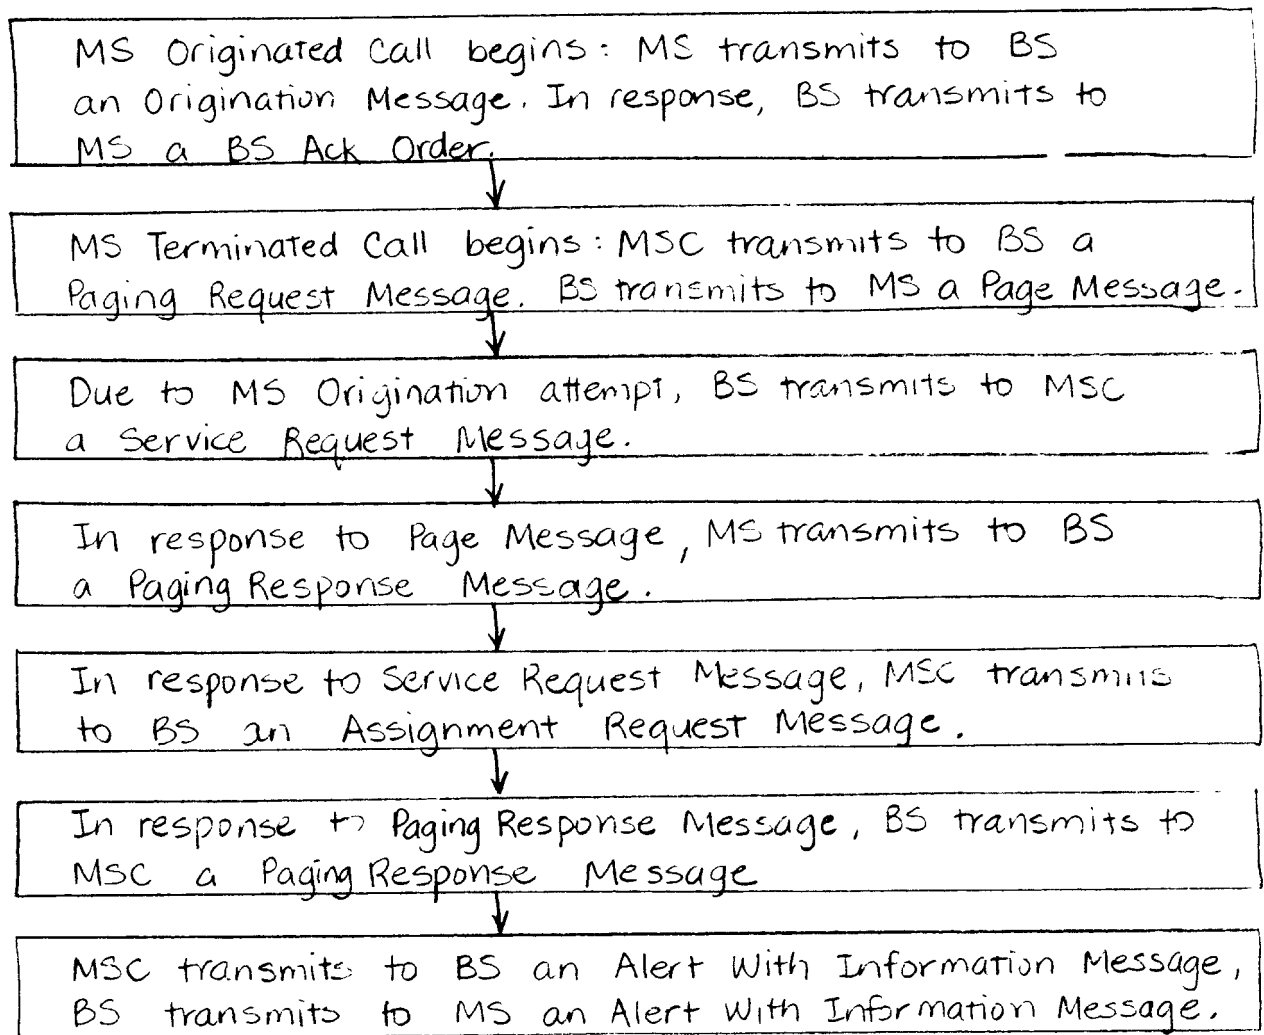


FIG. 10